

01/28/98  
jc494 U.S. PRO

A

IN THE UNITED STATES PATENT AND TRADE MARKS OFFICE

THE COMMISSIONER OF  
PATENTS & TRADE MARKS,  
Washington, D.C., 20231,  
U.S.A.

Date: January 27, 1998  
Our File: 551P04US

Sir:

Transmitted herewith for filing is the patent application of

Inventor: Nicholas W. DAWES

For: METHOD FOR DETERMINING THE DROP RATE, THE  
TRANSIT DELAY AND THE BREAK STATE OF  
COMMUNICATIONS OBJECTS

Enclosed are also:

- ☒ One sheet of informal drawings.
- ☐ An assignment of the invention to
- ☐ Certified copy of the priority application.

<u>For</u>	<u>Claims Filed</u>	<u>Extra Rate</u>	<u>Basic Fee</u>
Total Claims	8 - 20 =	x \$ 22.00 =	\$790.00
Independent claims	6 - 3 =	x \$ 82.00 =	246.00
Multiple dep. claims - per application		\$270.00 =	
Assignment recordal fee		\$ 40.00 =	
TOTAL FILING FEE --			\$1,036.00

- ☐ Please charge my deposit Account No. 16-0600 in the amount of \$ . A duplicate of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Account No. 16-0600. A duplicate copy of this sheet is enclosed.
- ☒ Draft No. 12999744-14/ in the amount of \$1,036.00 U.S. dated January 27, 1998 is enclosed to cover the  
☒ filing fee and ☐ assignment recording fee.

*Edward E. Pascal*  
.....  
Edward E. Pascal - Reg. 22934

PASCAL & ASSOCIATES,  
P.O. Box 11121, Station H,  
Ottawa, Ontario,  
Canada, K2H 7T8

09014537 012398

METHOD FOR DETERMINING THE DROP RATE, THE TRANSIT  
DELAY AND THE BREAK STATE OF COMMUNICATIONS OBJECTS

1.0 Field of the invention:

5           This method determines the drop rate, the transit delay and the break state of communications objects using the topology (connectivity) of these objects.

1.1 Background to the Invention:

10           Existing methods for determining whether or not a communications device is broken depend on periodically sending frames to it which require the device to respond (e.g. SNMP requests and responses (RFC 1157)). The absence of any response to a sequence of  
15           requests indicates the device is either broken or that the communications path to the device is broken. The best method for exploiting this information using knowledge of the network topology is reported by Dawes et al (Network Diagnosis by Reasoning in Uncertain  
20           Nested Evidence Spaces: N.W. Dawes, J. Altoft, B. Pagurek: IEEE Transactions on Communications, #2, 43, pp 466-476, 1995). This earlier method does not exploit measurements of the traffic rates on lines connected to devices and so is far more complex and far later to  
25           detect break faults than the method described below. It also is marginally less accurate. Commercially deployed break fault methods are very significantly inferior to even this previous method.

30           Existing methods for determining the transit delay across a device rely on requesting this information from the device itself, in the case where the device measures this delay and records it so it can be read externally. However, many devices do not have these facilities. Many of those that do, do so in a  
35           manner which is particular to that version of that

09014687.012998

manufacturer's device, placing the information in certain variables somewhere in the MIB (RFC 1213). This makes the process of determining the transit delay across a device cumbersome and complex, as variation  
5 need to be made for the particular device type.

Existing methods for determining the drop rate of a device depend on what percentage of responses it makes to management requests. They do not use knowledge of the local topology of objects and so are far less  
10 accurate than the present invention.

### 1.2 Summary of the Invention:

A method of determining the topology of a network of objects has been filed for patent, Dawes et al, U.S. Serial Numbers 08/558,729 filed November 16, 1995, 08/599,310 filed February 9, 1996 and (unknown)  
15 filed November 15, 1996 incorporated herein by reference. A manual method or some alternative automatic method, allows the connectivity of communications objects to be determined.

A new method described below also works on unmanaged objects and sets of unmanaged objects, which is novel.  
20

The invention exploits knowledge of the detailed local topology of communicating objects.

### 1.21 Definitions:

  
25

Communications objects such as routers have multiple communications lines. They accept frames from these lines and determine from information in each frame which line each frame should be sent out on.

30 Transit delay:

The time between the receipt of a frame and its dispatch out again is called the transit delay.

Drop rate:

Sometimes routing or switching communications  
35 devices cannot dispatch frames as fast as they receive

them and run out of memory to store the ones they receive, so they discard some. In addition, internal queues may fill up and for other reasons, frames get lost between acceptance and onward dispatch. The overall discard rate is usually called the drop rate.

Break:

Communications devices, routing or otherwise, can break. The break state for a device is true when it can neither send nor receive on any communications line, yet all the lines are ok. For example, when a device is powered down its break state is true. The break state is true for a line when the devices at each end are not broken and yet cannot send or receive traffic across it. For example, a line is broken when it is cut through.

NMC:

The network management center is the computer which is operating the software that performs this method. It also either performs interrogation of devices to provide data for the method below or receives such data to use in the method.

The NMC periodically requests from each device in a communications network the amount of traffic flowing in and out of each interface and the line status (OK or OFF) on the line for each interface on that device. This request should result in a set of replies from each device returned to the NMC. Not all devices need report the OK or OFF line status values or do so correctly.

If a device breaks then the NMC may detect four changes. First that it now receives no replies to its requests of this device. Second that it receives no replies from devices lying beyond this device and which are only reachable through this device. Third no traffic will now be detected flowing in any lines to or from this device. Four the line status bits on lines

connected to this broken device will change (e.g. from ok to off). Any subset of two or more of these four changes will be adequate to determine that the device is broken.

5           If a line between two devices is broken, the status bits on the interfaces at each end may change and no traffic will flow. Should neither device be broken then and yet should either of these conditions be met, then the line itself is broken. This diagnosis depends  
10       on the device break diagnosis above.

          The drop rate in a device is the difference between the mean drop rate measured to devices just beyond it (and connected to it) and the mean drop rate measured to devices just before it (and connected to  
15       it), where closeness is measured in terms of the number of hops to the NMC. Devices diagnosed as broken should not be included in any part of this calculation.

          The mean frame transit delay in a device is the difference between the mean round trip time measured to devices just beyond it (and connected to it) and the mean round trip time measured to devices just before it (and connected to it), where closeness is measured in  
20       terms of the number of hops to the NMC. Devices diagnosed as broken should not be included in any part  
25       of this calculation.

          The result is far simpler and far more generally applicable method which gives similar or better results. This means that all the devices in communications networks can now be analyzed, without any  
30       undue burden on the network bandwidth or in machine facilities.

          In accordance with an embodiment of the invention, a method for determining the mean transit delay of frames through one or more communications  
35       devices which receive and forward frames.

In accordance with another embodiment, a method for determining the mean drop rate of frames through one or more communications devices which receive and forward frames.

5 In accordance with another embodiment, a method for determining the break state of one or more communications devices and interfaces or lines to and from communications devices.

10 In accordance with another embodiment, a method of analyzing a communication network comprising determining a mean drop rate in a device x by polling each device from a network management computer (NMC) which is in communication with the network, and processing signals in the NMC to determine a drop rate  
15  $D(x)$ , in accordance with:

$$D(x) = ((L+(x)-L-(x))/2,$$
$$\text{and } L(x) = 1-A(x)$$

where

20  $A(x)$ : the fraction of poll requests from the NMC to device x for which the NMC receives replies (measured over the last M sampling periods), (wherein device x must not be broken),

$D(x)$ : the mean frame drop rate in device x,  
25  $L(c)$ : NMC's perception of the loss rate to device x and back,

$L-(x)$ : the NMC's perception of the mean value of  $L(z)$  for all devices z connected to device x, closer to the NMC than device x and which are not broken, and

30  $L+(x)$ : the NMC's perception of the mean value of  $L(z)$  for all devices z connected to device x, further away from the NMC than device x and which are not broken.

In accordance with another embodiment, a method of analyzing a communication network comprising  
35 determining a mean frame transit delay in a device x by

polling each device from a network management computer (NMC) which is in communication with the network and processing signals in the NMC to determine a transit delay  $T(x)$  in accordance with the process:

5 
$$T(x) = ((w+(x)-W-(x))/2$$

where

$T(x)$ : the mean frame transit delay for device  $x$ , (wherein device  $x$  must not be broken),

10  $W(x)$ : the mean round trip time taken between a poll request from the NMC to device  $x$  and the receipt of the reply by the NMC (measured over the last  $N$  sampling periods),

15  $W-(x)$ : The NMC's perception of the mean value of  $W(z)$  for all devices  $z$  connected to device  $x$ , closer to the NMC than device  $x$  and which are not broken,

$W+(x)$ : The NMC's perception of the mean value of  $W(z)$  for all devices  $z$  connected to device  $x$ , further away from the NMC than device  $x$  and which are not broken.

20 In accordance with another embodiment, a method of analyzing a communication network comprising determining a break state of communications devices connected in the network, by polling each device from a network management computer (NMC) which is in  
25 communication with the network, and processing signals in the NMC in accordance with at least one of

- 30 (a) (i) receiving no replies to polling signals directed to a device,  
(ii) receiving no replies from devices lying beyond said device,  
(iii) detecting no traffic flowing in any lines to or from said device,  
(iv) detecting changes to line status bits on lines connected to said device;

- (b) (i) determining zero traffic on a line  
and a device being otherwise determined  
as not being broken, declaring the line  
as being broken,  
5 (ii) declaring a line as being broken in  
step (b)(i) after a predetermined period  
of time,

and

- 10 (c) processing steps (a) and (b) with lines  
having more than two ends, as if it were a single device  
from the point of view of breaks.

Brief Introduction to the Drawings:

15 A better understanding of the invention will  
be obtained by considering the detailed description  
below, with reference to the following drawings, in  
which:

Figure 1 is an illustration of a portion of a  
network, and

20 Figure 2 is a block diagram of a structure for  
supplementing the invention.

Detailed Description of Preferred Embodiments  
of the Invention:

25 The method described below is general, is  
independent of device type and does not require a device  
to respond to management requests (e.g. SNMP).  
Moreover, the method described below works even on  
objects or sets of objects not responding to management  
requests (e.g. a portion of the network managed by some  
supplier of communications services).

30 Example:

Let a portion of a network be as in Figure 1.  
'D' lies closer to the NMC than 'x' and 'C' and 'B' lie  
beyond 'x'. In other words, 'D' is one hop closer to  
the NMC than 'x' and 'C' and 'B' are one hop beyond 'x'.  
35 Let none of the devices be broken.



5 The drop rate in 'x' is the difference between the mean drop rate measured to 'C' and 'B' and the mean drop rate measured to 'D'. The mean drop rate measured to 'D' is the fraction of the requests for information sent by the NMC to 'D' to which no replies have been received. The mean drop rates to 'C' and 'B' are computed similarly.

10 The mean frame transit delay 'x' is the difference between the mean round trip time measured to 'C' and 'B' and the mean round trip time to 'D'.

Should 'x' now break then replies will no longer be received from 'x', 'B' and 'C'. Simultaneously traffic will cease between 'D' and 'x' and the interface on 'D' for the line 'D' to 'x' will report a change from 'ok' to 'off'.

15 The software executing the method runs as a software module within the same main software process that executes the methods described in the aforementioned patent applications. This process receives device replies from a further software process that periodically requests the traffic and status information from all managed devices in the network. The main software uses these replies to determine the topology, and once the topology is known, also passes the replies to the logic module that executes the method. Changes in break state of any object and the current drop and delay values are recorded periodically in a database. The NMC operator can now observe these changes in information by operating a software tool that examines this database. An INTEL P180 cpu with 32MB of memory and a 1.2 Gbyte hard drive required only 0.4% of its cpu to perform real time analysis to execute this method on data recorded from every managed device every three minutes from a communications network with 3,000 communications nodes. Tests on over 10,000 simulated

breaks on simulated networks of between 30 and 3,000 nodes showed no cases where the break fault method was in error. Figure 2 describes a structure for implementing the methods described below.

5     2: To determine the drop rate of communications devices:

          The mean frame drop rate is the probability that a frame will get dropped in attempting to transit through a device.

Define:

- 10     M: how many sampling periods the drop rate is averaged over (e.g. 10). A sampling period is the interval between periodic requests for traffic and status values from interfaces (e.g. 30 seconds).
- A(x): the fraction of poll requests from the NMC to 'x' for which the NMC receives replies (measured over the
- 15     last M sampling periods). 'x' must be not be broken.
- D(x): the mean frame drop rate in device 'x'.
- L(c): NMC's perception of the loss rate to 'x' and back.
- 20     L-(x): The NMC's perception of the mean value of L(z) for all devices 'z' connected to 'x', closer to the NMC than 'x' and which are not broken.
- L+(x): The NMC's perception of the mean value of L(z) for all devices 'z' connected to 'x', further away from
- 25     the NMC than 'x' and which are not broken.

          The drop rate in a device is the difference between the mean drop rate measured to devices just beyond it (and connected to it) and the mean drop rate measured to devices just before it (and connected to

30     it), where closeness is measured in terms of the number of hops to the NMC. Note that in equation 2 the value of D(x) is half the difference between L+ and L-, as L+ and L- refer to round trip as opposed to one way trip drops.

35     Therefore:

$$L(x) = 1-A(x) \quad \text{.....eqn 1}$$

$$D(x) = (L+(x)-L-(x))/2 \quad \text{.....eqn 2}$$

Example 1:

Let a portion of the network be as in Figure

5 1.

Let:

A(B) = 0.95 i.e. The NMC gets replies to 95% of its traffic info requests from 'B'.

10 A(C) = 0.94 i.e. The NMC gets replies to 94% of its traffic info requests from 'C'.

A(D) = 0.96 i.e. The NMC gets replies to 96% of its traffic info requests from 'D'.

Therefore:

$$L(B) = 1-0.95 = 0.05$$

15  $L(C) = 1-0.94 = 0.06$

$$L(D) = 1-0.96 = 0.04$$

$$L-(x) = L(D) = 0.04$$

$$L+(x) = (L(C) + L(B))/2 = 0.055$$

$$D(x) = ((L(C) + L(B))/2 - L(D))/2 = (0.055-0.04) = 0.007$$

20 Therefore the mean frame loss rate in device 'x' is .007.

To determine the transit delay of communication devices:

25 The mean frame transit delay is how long it takes the average frame to transit through this device.

Define:

M: how many sampling periods the transit delay is to be averaged over (e.g. 4) A sampling period is the interval between periodic requests for traffic and status values from interfaces (e.g. 30 seconds).

30 T(x): the mean frame transit delay for device 'x'. 'x' must not be broken.

35 W(x): the mean round trip time taken between a poll request from the NMC to 'x' and the receipt of the reply by the NMC (measured over the last N sampling periods).

W-(x): The NMC's perception of the mean value of W(z) for all devices 'z' connected to 'x', closer to the NMC than 'x' and which are not broken.

5 W+(x): The NMC's perception of the mean value of W(z) for all devices 'z' connected to 'x', further away from the NMC than 'x' and which are not broken.

The mean frame transit delay in a device is the difference between the mean round trip time measured to devices just beyond it (and connected to it) and the  
 10 mean round trip time measured to devices just before it (and connected to it), where closeness is measured in terms of the number of hops to the NMC. Note that in equation 3 the value of T(x) is half the difference between W+ and W-, as W+ and W- refer to round trip as  
 15 opposed to one way trip times.

$$T(x) = (W+(x) - W-(x)) / 2 \quad \text{.....eqn 3}$$

Example 2

Let a portion of the network be as in Figure 1.

20 Let:

W(B) = 0.100 i.e. The NMC gets replies from 'B' on average 0.100 seconds after it sends 'B' a request.

25 W(C) = 0.104 i.e. The NMC gets replies from 'C' on average 0.104 seconds after it sends 'C' a request.

W(D) = 0.081 i.e. The NMC gets replies from 'D' on average 0.081 seconds after it sends 'D' a request.

30 Therefore:

$$W-(x) = W(D) = 0.081$$

$$W+(x) = (W(B) + W(C)) / 2 = (0.100 + 0.104) / 2 = 0.102$$

$$T(x) = (W+(x) - W-(x)) / 2 = (0.102 - 0.081) / 2 = 0.010$$

35 Therefore the mean frame transit delay in device 'x' is 0.021 seconds.

To determine the break state of communications devices:

(a) Device breaks.

5 If a device breaks then the NMC may detect four changes. First that it now receives no replies to its requests of this device. Second that it receives no replies from devices lying beyond this device and which are only reachable through this device. Third no traffic will now detected flowing in any lines to or from this device. Fourth that the line status bits on lines connected to this broken device will change (e.g. from ok to off). Any subset of two or more of these four changes will be adequate to determine that the device is broken.

15 Should changes be in conflict then the presence of traffic to or from a device certainly indicates that device is not broken.

Should an interface line status be reported as OFF when traffic was flowing on a line, then that meaning of OK and OFF are considered reversed for that interface.

(b) Line breaks (2 ends).

25 Should a device not be broken and it reports zero traffic on a line and a change from ok to off on the interface status and the other end of the line also not be broken, then the line is declared broken. Note that this categorizes the line and the two interfaces are being a single unit from the point of view of this diagnosis.

30 Should a line never have traffic reported on an interface in a device and no status bit changes be detected, then the line will be considered broken after a sufficiently long period of time, should the devices at both ends not be broken.

(c) Line breaks (>2 ends)

A line which has more than two ends is treated as a device from the point of view of breaks.

Example:

5           Let a portion of the network be as in Figure  
1.

10           Let device 'x' break. The NMC now will now  
receive no replies from 'x', 'B' or 'C'. It will also  
find that the traffic between 'D' and 'x' has dropped to  
zero.

15           The methods described above can be performed  
as a single method of partitioned into two or three  
methods. They can record and/or report the change or  
current state of the devices and interfaces under  
consideration to a database or file, to another software  
20           element or elements within the same cpu or not, directly  
or remotely to a screen or screens, to one or more NMCs,  
or in other ways. They can operate in a single cpu or  
distributed in multiple cpus. Each method can consider  
one or more devices, either serially or in parallel.  
The methods can share a common input of responses from  
the NMC or can have different input forms, and the  
methods can be integrated within a single NMC,  
25           distributed among several NMC or performed partially or  
wholly by other cpus.

I Claim:

1. A method of analyzing a communication network comprising:

5 determining a mean drop rate in a device x by polling each device from a network management computer (NMC) which is in communication with the network, and processing signals in the NMC to determine a drop rate  $D(x)$ , in accordance with:

10 
$$D(x) = ((L+(x)-L-(x))/2,$$
  
and  $L(x) = 1-A(x)$

where

$A(x)$ : the fraction of poll requests from the NMC to device x for which the NMC receives replies  
15 (measured over the last M sampling periods), (wherein x must not be broken),

$D(x)$ : the mean frame drop rate in device x,

$L(c)$ : NMC's perception of the loss rate to device x and back,

20  $L-(x)$ : the NMC's perception of the mean value of  $L(z)$  for all devices z connected to device x, closer to the NMC than device x and which are not broken, and

$L+(x)$ : the NMC's perception of the mean value of  $L(z)$  for all devices z connected to device x, further  
25 away from the NMC than device x and which are not broken.

2. A method of analyzing a communication network comprising determining a mean frame transit  
30 delay in a device x by polling each device from a network management computer (NMC) which is in communication with the network and processing signals in the NMC to determine a transit delay  $T(x)$  in accordance  
35 with the process:

$$T(x) = ((w+(x)-W-(x))/2$$

where

$T(x)$ : the mean frame transit delay for device  $x$ , (wherein device  $x$  must not be broken),

5            $W(x)$ : the mean round trip time taken between a poll request from the NMC to device  $x$  and the receipt of the reply by the NMC (measured over the last  $N$  sampling periods),

10            $W-(x)$ : The NMC's perception of the mean value of  $W(z)$  for all devices  $z$  connected to device  $x$ , closer to the NMC than device  $x$  and which are not broken,

15            $W+(x)$ : The NMC's perception of the mean value of  $W(z)$  for all devices  $z$  connected to device  $x$ , further away from the NMC than device  $x$  and which are not broken.

3. A method of analyzing a communication network comprising determining a break state of communications devices connected in the network, by  
20           polling each device from a network management computer (NMC) which is in communication with the network, and processing signals in the NMC in accordance with at least one of

- 25           (a) (i) receiving no replies to polling signals directed to a device,  
              (ii) receiving no replies from devices lying beyond said device,  
              (iii) detecting no traffic flowing in any  
30           lines to or from said device,  
              (iv) detecting changes to line status bits on lines connected to said device;  
              (b) (i) determining zero traffic on a line and a device being otherwise determined



as not being broken, declaring the line  
as being broken,  
(ii) declaring a line as being broken in  
step (b)(i) after a predetermined period  
of time,

and

(c) processing steps (a) and (b) with lines  
having more than two ends, as if it were a single device  
from the point of view of breaks.

4. A method comprised of determining a mean  
transit delay of frames through one or more  
communications devices which receive and forward frames.

5. A method comprised of determining a mean  
drop rate of frames through one or more communications  
devices which receive and forward frames.

6. A method comprised of determining a break  
state of one or more communications devices and  
interfaces or lines to and from communications devices.

7. A method as defined in claim 4, 5 or 6  
where the communications device or devices is either a  
single object or aggregates of objects.

8. A method as defined in claim 4, 5 or 6  
where the communications device or devices is either a  
single object or aggregates of objects, none of which



# ABSTRACT

A method of analyzing a communication network comprising determining a mean drop rate in a device x by polling each device from a network management computer (NMC) which is in communication with the network, and processing signals in the NMC to determine a drop rate  $D(x)$ , in accordance with:

$$D(x) = ((L+(x)-L-(x))/2,$$
$$\text{and } L(x) = 1-A(x)$$

where

$A(x)$ : the fraction of poll requests from the NMC to device x for which the NMC receives replies (measured over the last M sampling periods), (wherein x must not be broken),

$D(x)$ : the mean frame drop rate in device x,

$L(c)$ : NMC's perception of the loss rate to device x and back,

$L-(x)$ : the NMC's perception of the mean value of  $L(z)$  for all devices z connected to device x, closer to the NMC than device x and which are not broken, and

$L+(x)$ : the NMC's perception of the mean value of  $L(z)$  for all devices z connected to device x, further away from the NMC than device x and which are not broken.

09014637-012299

0904437 01890

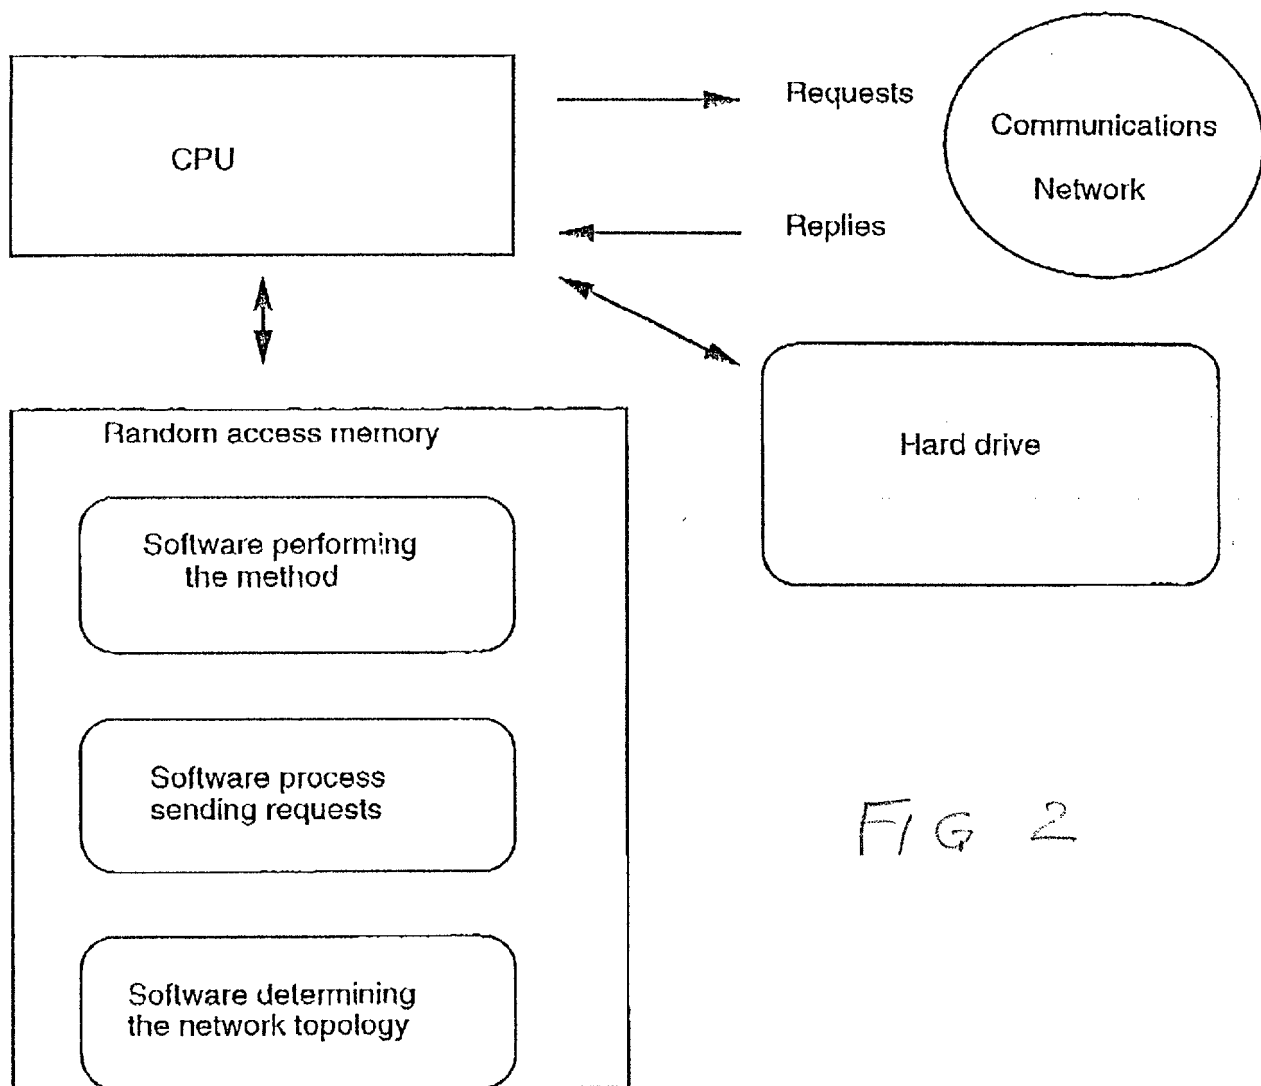


FIG 2

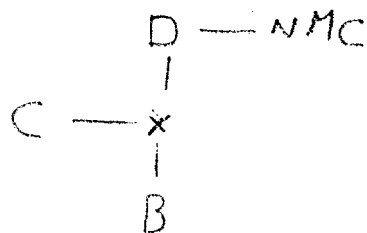


FIG 1

## DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD FOR DETERMINING THE DROP RATE, THE TRANSIT DELAY AND THE BREAK STATE OF COMMUNICATIONS OBJECTS** the specification of which is attached hereto unless the following is checked:

\_\_\_ was filed on \_\_\_\_\_ as United States  
Application No. \_\_\_\_\_ ; or  
\_\_\_ PCT International Application No. \_\_\_\_\_  
\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a) - (d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Claimed

<u>2,196,133</u> (Number)	<u>Canada</u> (Country)	<u>28 01 1997</u> (Day/Month/Year Filed)	<u>X</u> Yes	<u>      </u> No
<u>          </u> (Number)	<u>          </u> (Country)	<u>          </u> (Day/Month/Year Filed)	<u>      </u> Yes	<u>      </u> No
<u>          </u> (Number)	<u>          </u> (Country)	<u>          </u> (Day/Month/Year Filed)	<u>      </u> Yes	<u>      </u> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

<u>          </u> Application Serial No.	<u>          </u> (Filing Date)
<u>          </u> Application Serial No.	<u>          </u> (Filing Date)

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT International application, designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Appln. No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------	---------------	---

(Appln. No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------	---------------	---

As a named inventor(s), I(we) hereby appoint the following attorney(s) and/or agent to prosecute this application and transact all business in the Patent and Trade Mark Office connected therewith:

EDWARD E. PASCAL - Reg. 22934    SUSAN D. BEAUBIEN - Reg. 37571  
ROBERT A. WILKES - Reg. 28170    ROBERT G. HENDRY - Reg. 22927

Send correspondence to:                      PASCAL & ASSOCIATES  
P.O. Box 11121, Station "H"  
Nepean, Ontario  
Canada, K2H 7T8

Direct Telephone calls to:                      Edward E. Pascal  
at telephone No.                                (613)820-1366.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements, and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of sole or first inventor	Date
Nicholas W. DAWES	

Inventor's signature

Residence  
99 Lyttleton Gardens, Ottawa, Ontario, Canada, K1L 3A4

Citizenship  
Canadian

Post Office Address  
99 Lyttleton Gardens, Ottawa, Ontario, Canada, K1L 3A4

0904467-0-99705